


The Vernal 15

MP Series

Ultra-Compact, 2-Way Full-Range All Environment Loudspeaker System

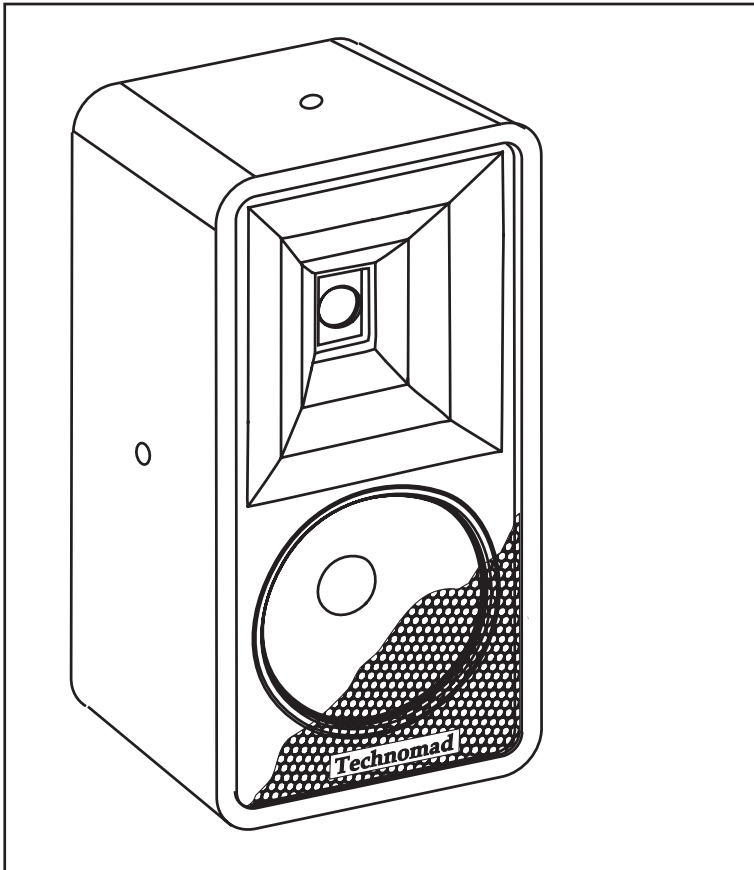

Superb audio quality

Horn-loaded 1" HF compression driver

Fully weatherproof construction

Optional multi-tap 70-volt transformer

Molded-in colors will not crack or fade

Comprehensive warranty: 10 year cabinet, 5 year hardware, 2 year electronics

1/4-20 T-Nut flypoints on each end

Two rear 1/4-20 T-Nuts for bracket mounting

Three layer, chemically treated, WeatherTech™ grill

Twelve (12) optional cabinet colors

Self-draining cabinet design

Mil-Spec 810E compliant

Unrivaled projection in the ultracompact loudspeaker class

One-piece 3/8" thick molded cabinet

The smallest of the MP Series of loudspeakers, the Vernal 15 is the perfect loudspeaker for any application where ultra-compact size and powerful full-spectrum sound are required. No other ultra-compact loudspeaker can rival the sensitivity and power-handling of the Vernal 15.

The Vernal 15 features a true horn-loaded high frequency driver, resulting in much better throw and vocal intelligibility in high ambient noise environments than any dome-tweeter loaded loudspeaker. Only the highest quality metalized polypropylene capacitors and heavy gauge inductors are used in Technomad networks, minimizing insertion loss and producing smooth response throughout the operating bandwidth.

The Vernal 15 was designed for maximum flexibility and ease of use. Developed with the needs of contractors in mind, the Vernal 15 incorporates a wide range of mounting options. Threaded 1/4-20 inserts on each end allow easy suspension or yoke-yoke-bracket installation. The Vernal 15 has two 1/4-20 inserts on the back of the cabinet which are compatible with a wide range of wall-mounting brackets including the optional stainless steel Technomad Vernal bracket.

The Vernal 15 is extremely weather resistant. Both the rubber-surround polypropylene mid/bass driver and the high-frequency compression driver offer excellent performance in even the most severe weather conditions. The three layer WeatherTech™ grill system sheds water off of the loudspeaker before it can penetrate to the components and all internal assemblies are treated to prevent damage by any moisture which gets past the grill. Rust is never a problem as all external hardware, including the grill, is black stainless steel. Technomad cabinets are cast from Mil-Spec polyethylene, carry a 10-year warranty and are self-draining. From the inside out, every part of every Technomad loudspeaker is designed to provide optimum performance in even the worst conditions.

Combining excellent sound reproduction with high power-handling in an architecturally neutral cabinet, the Vernal 15 is used worldwide in applications such as resorts, theme parks, restaurants, residences, and cruise ships.

Technomad
Audio. Anywhere.

www.technomad.com
customer@technomad.com
800.464.7757 / +1 617.275.8898
Tina Drive South Deerfield, MA, 01373

Specifications

Vernal 15

Audio Specifications

Frequency Response	70Hz- 20kHz (+/- 2 dB)
	55Hz- 20kHz (+/- 10 dB)
Maximum Continuous Power ¹	120 watts
Maximum Peak Power ¹	250 watts
Recommended Amplifier Power	200 watts
Sensitivity *	92 dB SPL
Maximum Output (long term) ^{1**}	114 dB SPL
Maximum Output (peak)	117 dB SPL
HF Dispersion	120° V x 120° H
Nominal Impedance	8 ohms

Signal Chain

HF	1" Horn Loaded Compression Driver
LF	5.0" Polypropylene Driver
Connectors	1x two-pole terminal block
Crossover	Passive Internal
70-Volt (option)	10, 20, 40, 60 watt switchable taps


¹ Based on ALMA EIA test 426B

* RTA Total output axial 1W@1M


** Based on Maximum Continuous Power rating

Physical Specifications


Height	9.1"	23.0cm
Width	6.1"	15.4 cm
Depth	6.1"	15.40 cm
Weight	8.5 lb	3.86 kg
Shipping Weight	10 lb	4.54 kg
Fittings	2 x 1/4-20 inserts (1 ea. end)	
	2 x 1/4-20 on back for multi-mount	
Cabinet	Mid-density Polyethylene	
Grill	Stainless Steel Weather Tech™ (Black standard)	



Vernal 15 End View

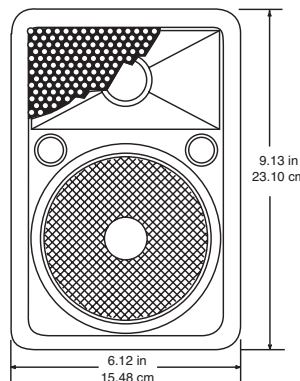

Vernal 15 Front View

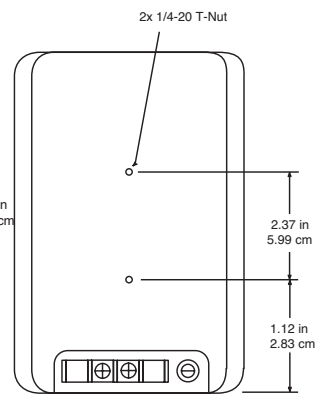

Vernal 15 Back View

Architectural and Engineering Specifications

The loudspeaker system shall be of two-way type consisting of a 5" low frequency cone type transducer in a ported enclosure and a horn-mounted 1" compression driver.

The system shall meet the following performance criteria:
 Frequency Response: 70Hz - 20 kHz. Power Handling: 120W. Rated Impedance shall be 8 ohms. High frequency dispersion shall be 120° H x 120° V. The loudspeaker shall have an optional 70-volt transformer, with power taps selected by a rotary switch. The system shall include an internal passive crossover network, and electrical connection via a screw-terminal block.

The cabinet shall be moulded from mid-density polyethylene.

All cabinet dyes shall be non-heavy metal based. The cabinet shall have a 10 year warranty. The system shall have two 1/4-20 flypoint inserts on each end for yoke mounting.

The system shall also have two 1/4-20 flypoint inserts on the back of the cabinet to allow attachment of an multi-mount bracket.

All drivers shall be protected by a three-layer chemically treated grill system. Cabinet drainage shall be provided by bleed holes.

The loudspeaker system shall be the Technomad Vernal 15.

Technomad
 Audio. Anywhere.™

www.technomad.com
 customer@technomad.com
 800.464.7757 / +1 617.275.8898
 Tina Drive South Deerfield, MA, 01373